



IMPACT USA

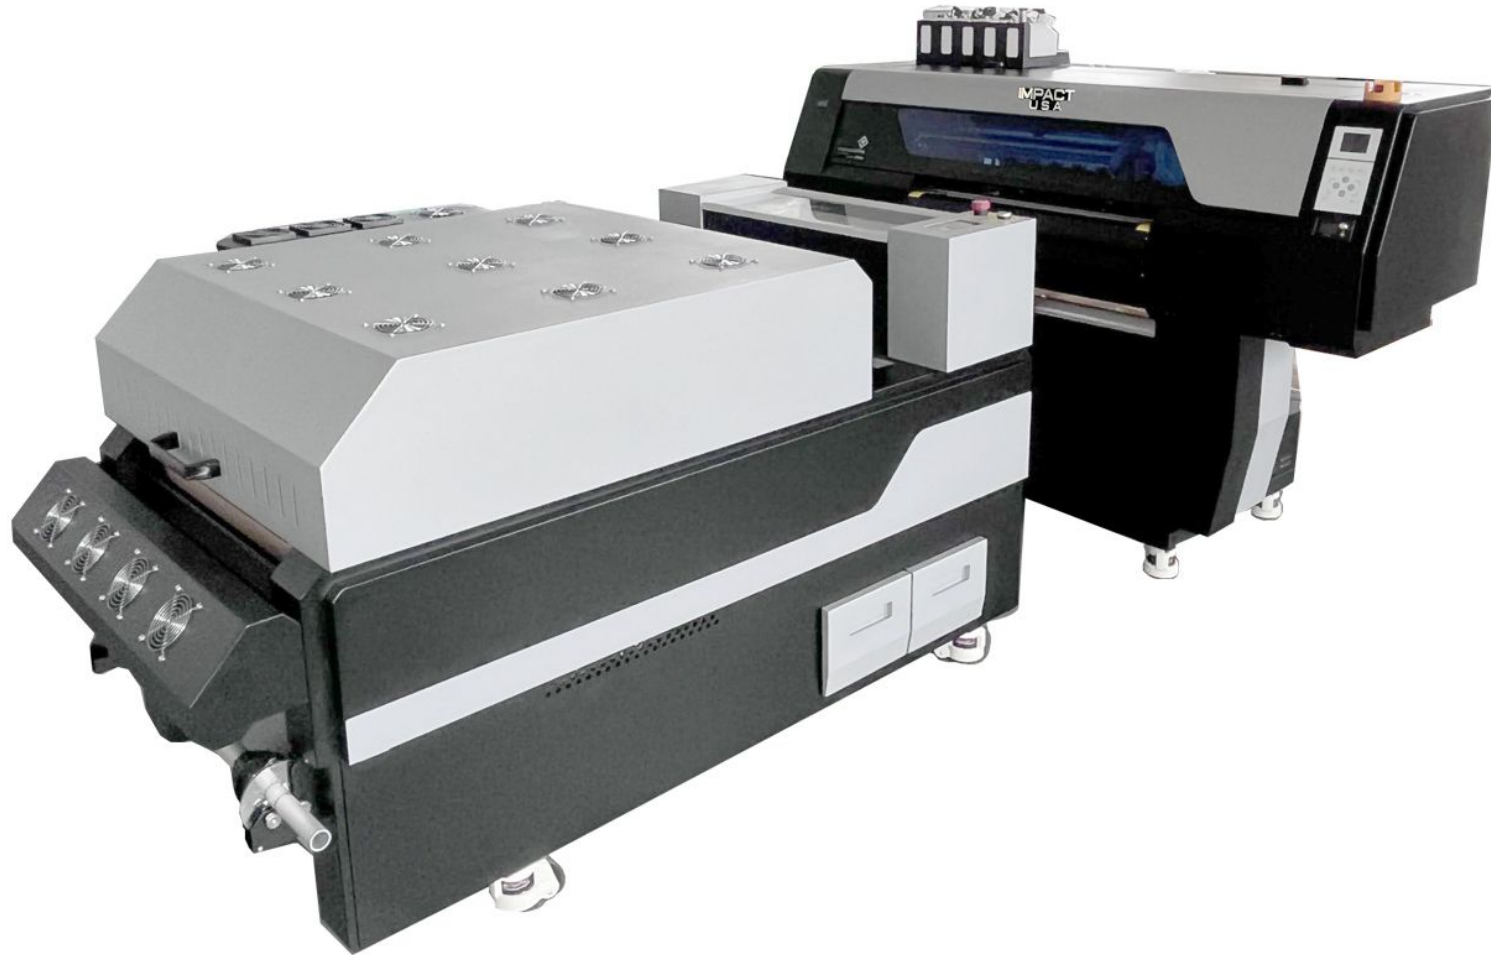

C M Y K W FM FY LC LM

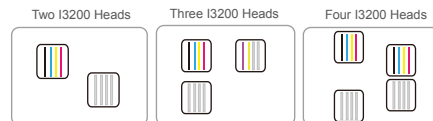

*** Dual/Three I3200 Print Heads Speed**

360x1800dpi - 4pass	10 m ² /h
720x1200dpi - 6pass	7 m ² /h

*** Four I3200 Print Heads Speed**

360x1800dpi - 4pass	20 m ² /h
720x1200dpi - 6pass	14 m ² /h

• Technical Specifications

Print Head	13200 Print Heads (2/3/4 Optional)	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	24.4 in.(620 mm)
	Thickness	Maximum 39 mil(1 mm)
Printing Width	23.9 in.(600 mm)	
Ink Cartridges	Type	Transfer Pigment Ink
	Capacity	Continual Ink Supply System (220ML)
	Color	CMYK+W/CMYK,FY,FM,LC,LM+W (3H)
Speed	4 Pass (360°1800dpi)	10 m²/h
	6 Pass (720°1200dpi)	7 m²/h
Applicable Media	Transfer film	
Color Manage	ICC or density curve	
Media Heating System	Powder & color fixing machine	
Interface	RJ-45/LAN	
RIP Software	Main top	
Power Supply	50HZ/60HZ,220V/110V/10A	
Environment	Temperature	10 C to 38 C
	Humidity	40% to 70%
Printer Dimensions (with stand)	L1620mm*W620mm*H1280mm	
Printer Dimensions	L1700mm*W700mm*H270mm	
Weight	G.W.	230kg
	N.W.	180kg



Shaking Powder and Color Fix Machine

Media Width	0-600mm	
Applicable Media	Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.	
Powder Control	Powder Shake Control, Powder Control, Powder Direction And Volume Control	
Heating & Drying Function	Multi-stage Heating System, Drying, Cold Air Fan Function	
Rewind Function	Automatic Induction Winding	
Electrical Parameters	Rated Voltage: 220V	Rated Current: 20A
	Rated Power: 3.42KW	Power Consumption: 1KW-2.5KW
Packing Size & Weight	1900*1120*1180mm	Standard With 4 Heads: 2100*1120*1140mm
	G.W.235kg N.W.210kg	G.W: 300kg N.W: 200kg
Powder Shaker Size	1780*980*1040mm / 178011001040mm (Built-in smoke filter)	


Cotton T-shirt Print



THK high-precision mute rail



Stable bulk system ensures amazing printing speed.



High-performance take up device, suitable for various media.



High quality hot melt powder, can be used repeatedly.



With belt system, you can cut off files, while printing. Since the film is fed by air suction system.



Efficient powder shaking device, powder shaking is clean.



Modular platform to ensure printed material is flat and level



External power supply, intelligent rolling system.